


Tirak® man-riding hoists • L-series

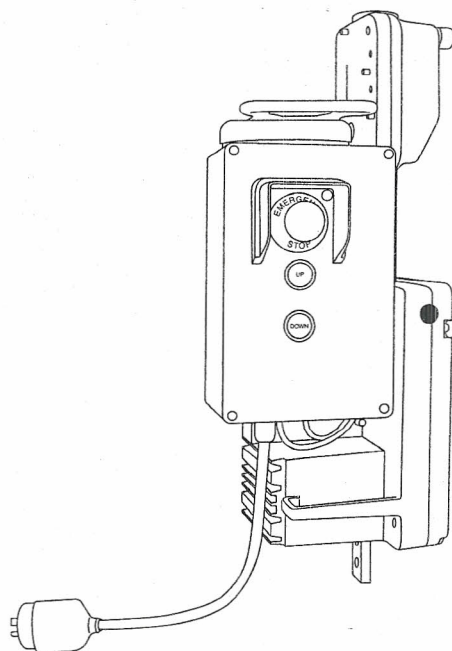

- **Power consumption reduced by 20%**
hoist is less sensitive to low power supply
- **Among the lightest hoists on the market**
ergonomically designed for the users
- **Based on the Tirak® technology**
known for having fewer parts resulting in lower maintenance cost
- **Speed of 10 m/min. (33 ft./min.)**
maintaining high productivity
- **Low voltage indicator light**
on single phase models reducing service calls
- Longer wire rope usage, more than 3,000 cycles with Tractel recommended wire rope
- Optional hour meter for regular service maintenance
- Flanged motor for easier service
- New technology
 - High strength aluminum for casings
 - High strength steel for gears
 - Special hardening for gear surfaces
 - Synthetic oil to reduce friction and provide wider temperature range of use
 - Radial bearings
 - One-roller pressure system

Tirak® – L-series hoists – Electric


Part #	Model	Rated load	Description	Wire rope	Amps.	lbs.	Price
Models with BSO 500 overspeed device							
100909K	LE501PA1	1,000 lbs.	33 fpm, 110 V, 1 phase	5/16 in.	10.5	84	\$9,600.00
43859K	LE501P1	1,000 lbs.	33 fpm, 220 V, 1 phase	5/16 in.	6.8	84	\$9,720.00
43879K	LE500P1	1,000 lbs.	33 fpm, 220 V, 3 phase	5/16 in.	4.8	73	\$9,320.00
Models with BS/BSO 500 overspeed device							
43859K2	LE501P2	1,000 lbs.	33 fpm, 220 V, 1 phase	5/16 in.	6.8	89	\$10,740.00
43879K2	LE500P2	1,000 lbs.	33 fpm, 220 V, 3 phase	5/16 in.	4.8	78	\$10,010.00

Tirak® – L-series hoists – Air

Part #	Model	Rated load	Description	Wire rope	lbs.	Price
Models with BSO 500 overspeed device						
32578K	LA500P1	1,000 lbs.	35 fpm, 60 CFM @ 85 PSI	5/16 in.	84	\$10,170.00
Models with BS/BSO 500 overspeed device						
32578K2	LA500P2	1,000 lbs.	35 fpm, 60 CFM @ 85 PSI	5/16 in.	89	\$11,190.00

Skysafe® MP03 modular suspended platforms

Skysafe® – Modular suspended rigid platforms MP03 – UL classified*



Part #	Description	kg	Price
<ul style="list-style-type: none"> • Rated load from 750 to 1,500 lbs. (340 to 680 kg) depending on length • Max. allowable length 49 ft. with end stirrup & 59 ft. with "C" stirrup 			
PMR1800D	9'10" (3 m) rigid platform section with four H-brackets	132	\$2,512.00
PMR1700D	6'6" (2 m) rigid platform section with four H-brackets	88	\$1,830.00
PMR1600D	3'3" (1 m) rigid platform section with four H-brackets	50	\$1,311.00
PMR1500D	1'8" (0.5 m) rigid platform section with four H-brackets	36	\$1,251.00

*UL Classified applies to 2 m and 3 m platforms only.

U-Frames (PMR0041C) can be used in place of 4-H bracket to connect sections

Skysafe® – Modular suspended rigid platforms KD01 – UL classified*

Part #	Description	lbs.	Price
PLATFORM ASSEMBLIES			
PKR1800DK	9'10" (3 m) knockdown platform assembly with deck and two sides	132	\$2,375.00
PKR1700DK	6'6" (2 m) knockdown platform assembly with deck and two sides	95	\$1,792.00
PKR1600DK	3'3" (1 m) knockdown platform assembly with deck and two sides	95	\$1,318.00
PLATFORMS			
PKR1850D	9'10" (3 m) knockdown side section (2 required per section)	188	\$635.00
PKR1810D	9'10" (3 m) knockdown deck section	10	\$1,105.00
PKR1750D	6'6" (2 m) knockdown side section (2 required per section)	32	\$473.00
PKR1710D	6'6" (2 m) knockdown deck section	31	\$846.00
PKR1650D	3'3" (1 m) knockdown side section (2 required per section)	22	\$339.00
PKR1610D	3'3" (1 m) knockdown deck section	15	\$640.00

Fully compatible with Skysafe® modular suspended rigid platforms
 Rated load from 750 to 1,500 lbs. (340 to 680 kg) depending on length
 Max. allowable length 49 ft. with end stirrup & 59 ft. with "C" stirrup
 Please see manual for full operating conditions and instructions.
 *UL Classified applies to 2 m and 3 m platforms only

